



PRICE LIST

Ref No. RRKL/LP/BCISI/04/21
w.e.f. 1st April 2021

THE ONLY INDIAN
WIRE BRAND
TRUSTED BY

85+

COUNTRIES
GLOBALLY



RR KÄBEL
WIRES & CABLES

**AKALMAND BANO,
SAHI CHUNO.**

AKALMAND BANO, SAHI CHUNO.



BUILDING WIRES

RR KÄBEL
WIRES & CABLES

INDIA'S ONLY WIRE WITH
REACH • RoHS
CE • CPR Compliant



SUPEREX FR

FR PVC Insulated Single Core Cables



RR Kabel make single core unsheathed Multistrand High Conductivity plain annealed Copper, FR PVC Insulated Industrial Cables in voltage grade upto and including 1100 Volts, as per IS 694 (HSN Code: 8544)

Size (Sq.mm)	Configuration	Rate/90 mtr	No. of Coils packed in an Outer Box
0.75	24/0.2	1091	24
1.0	14/0.3	1480	20
1.5	22/0.3	2166	12
2.5	36/0.3	3458	12
4.0	56/0.3	5043	8
6.0	84/0.3	7512	4
10.0	140/0.3	13779	3
16.0	126/0.4	22129	2

UNILAY HR FR

HR FR PVC Insulated Single Core Cables



RR Kabel make single core unsheathed Multistrand Flexible High Conductivity plain annealed Copper, HR FR PVC Insulated Industrial Cables in voltage grade upto and including 1100 Volts, as per IS 694 (HSN Code: 8544)

Size (Sq.mm)	Configuration	Rate/90 mtr	No. of Coils packed in an Outer Box
1.0	37/0.19	1561	20
1.5	37/0.23	2274	12
2.5	61/0.23	3641	12
4.0	61/0.29	5556	8
6.0	91/0.29	8259	8

FLAMEX FR-LSH

FR-LSH PVC Insulated Single Core Cables



RR Kabel make single core unsheathed Multistrand High Conductivity plain annealed Copper, FR-LSH PVC Insulated Industrial Cables in voltage grade upto and including 1100 Volts, as per IS 694 (HSN Code: 8544)

Size (Sq.mm)	Configuration	Rate/90 mtr	No. of Coils packed in an Outer Box
1.0	14/0.3	1545	20
1.5	22/0.3	2275	12
2.5	36/0.3	3626	12
4.0	56/0.3	5294	8
6.0	84/0.3	7861	4

FIREX LSOH HALOGEN FREE FLAME RETARDANT 90 °C, CROSSLINKED



RR KABEL make single core unsheathed Multistrand High Conductivity plain annealed Copper, Cross linked Halogen Free Flame Retardant(HFFR) 90 °C Insulated Industrial Cables in voltage grade upto and including 1100 Volts, as per IS 17048 (HSN Code: 8544)

Size (Sq.mm)	Configuration	Rate/90 mtr	No. of Coils packed in an Outer Box
1.00	14/0.3	1852	20
1.50	22/0.3	2644	12
2.50	36/0.3	4178	12
4.00	56/0.3	6252	8
6.00	84/0.3	9056	4

*FIREX LSOH – Insulation conforming to HFI XL 90 as per IS 17048


RR KABEL FR / FR-LSH / LSOH



RR KABEL make single core unsheathed Multistrand High Conductivity plain annealed Copper, FR PVC / FR-LSH PVC / Thermoplastic Halogen Free Flame Retardant (HFFR) 70 °C Insulated Industrial Cables in voltage grade upto and including 1100 Volts (HSN Code: 8544)

Size (Sq.mm)	Configuration	AMPS	RATE / 200 MTR		
			RR KABEL FR FR PVC INSULATION As Per IS 694	RR KABEL FR-LSH FR-LSH PVC INSULATION As Per IS 694	RR KABEL LSOH Thermoplastic Halogen Free Flame Retardant (HFFR) 70 °C Insulation As Per IS 17048
0.75	24/0.2	8	2458	2544	2877
1.0	32/0.2	13	3256	3370	3679
1.5	30/0.25	17	4775	4943	5252
2.5	50/0.25	24	7780	8052	8477
4.0	56/0.3	30	11755	12166	12837
6.0	84/0.3	38	17477	18046	19040

*RR KABEL LSOH – Insulation conforming to HFI TP 70 as per IS 17048

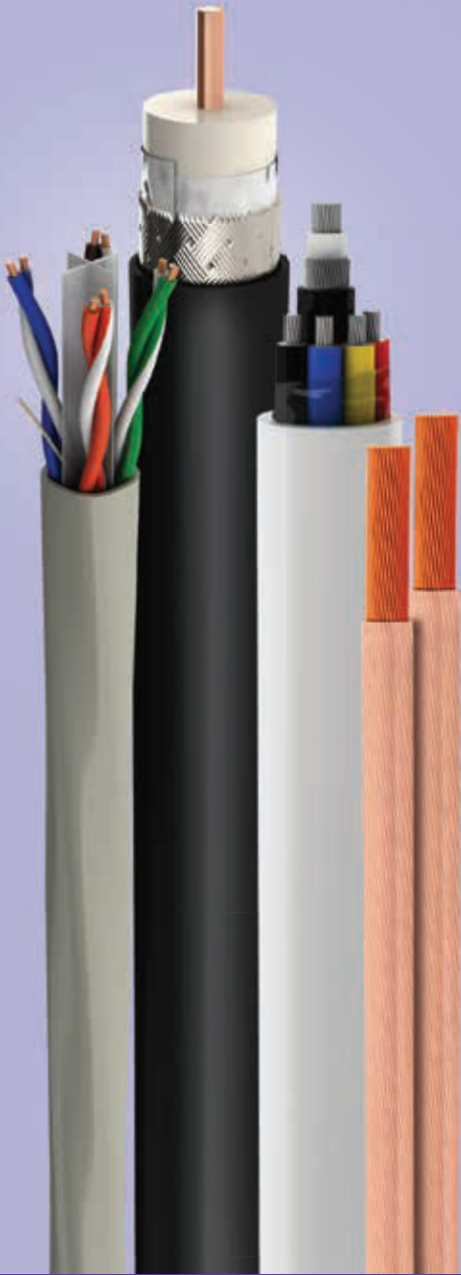

COMMUNICATION CABLES

RR KĀBEL
WIRES & CABLES

- RATNA CO-X
- RATNA LAN
- RATNA COM
- CCTV CAMERA CABLE
- SPEAKER CABLE

RATNA CO-X



RR Kabel make Electrolytic grade solid annealed bare copper conductor gas injected physical polyethylene foam insulated, wrapped with Aluminium Mylar tape and Al alloy wire braided, Jelly flooded and PVC Jacketing in Black Colour, Co-Axial Industrial Cables. (HSN Code : 8544)

RG 59 F		RG 6 F		RG 11 F	
90 Mtr.	305 Mtr.	90 Mtr.	305 Mtr.	90 Mtr.	305 Mtr.
1820	6170	2327	7885	5184	17569

RATNA LAN



RR Kabel make Solid bare copper conductor 4 Pair unshielded twisted pair (UTP) Industrial cables for Computer Lan Network with Grey colour & FR PVC Jacket. (HSN Code : 8544)

CAT 5e		CAT 6	
100 Mtr.	305 Mtr.	100 Mtr.	305 Mtr.
2932	8942	3922	11959

RATNA COM



RR Kabel make Solid Electrolytic annealed bare copper conductor Industrial Switchboard & Telephone Cables with high density polyethylene insulation, paired, polyester taped, Nylon Rip Cord and Grey colour sheathed with FR PVC, generally conform to "ITD specification S/WS 113 C" (HSN Code : 8544). (Rate/90 Mtr Coil)

Dia	1 Pair	2 Pair	3 Pair	4 Pair	5 Pair	10 Pair	20 Pair
0.5 mm	769	1353	1995	2615	3257	6220	11811

CCTV CAMERA CABLES



RR Kabel make Annealed Tinned copper conductor, PE Insulated, ATC Braided, Polyester tape screened, PVC outer sheathed Industrial CCTV Camera Cables.(HSN CODE : 8544)

Size	Packing	Rate Per Coil	No. of Coils packed in an Outer Box
3 + 1	90 Mtr.	3429	3
4 + 1	90 Mtr.	3844	3

SPEAKER CABLES



RR Kabel make Multistrand Annealed bare copper conductor, PVC Insulated Industrial Speaker wires. (HSN CODE : 8544)

Size	Packing	Rate Per Coil	No. of Coils packed in an Outer Box
2C x 0.50	90 Mtr.	1539	10
2C x 0.75	90 Mtr.	2194	10
2C x 1.0	90 Mtr.	2768	8
2C x 1.5	90 Mtr.	3991	8
2C x 2.5	90 Mtr.	6359	8

* 3% Extra for Transparent sheath



INDUSTRIAL CABLES

RR KÄBEL
WIRES & CABLES

- FLEXIBLE SINGLE CORE CABLE
- FLEXIBLE MULTICORE CABLES
- SHIELDED CABLE
- BRAIDED CABLE

RR KABEL FR / FR-LSH / LSOH



RR KABEL make single core unsheathed Multistrand High Conductivity plain annealed Copper, FR PVC / FR-LSH PVC / Thermoplastic Halogen Free Flame Retardant (HFFR) 70 °C Insulated Industrial Cables in voltage grade upto and including 1100 Volts (HSN Code: 8544)

RATE / 100 MTR					
Size (Sq.mm)	Configuration	AMPS	RR KABEL FR FR PVC INSULATION As Per IS 694	RR KABEL FR-LSH FR-LSH PVC INSULATION As Per IS 694	RR KABEL LSOH Thermoplastic Halogen Free Flame Retardant (HFFR) 70 °C Insulation As Per IS 17048
10.0	140/0.3	52	15311	15848	16821
16.0	126/0.4	70	24353	25201	26619
25.0	196/0.4	88	39097	40661	43789
35.0	276/0.4	112	54689	56877	61252
50.0	396/0.4	146	77250	80340	86519
70.0	360/0.5	216	110529	114950	123793
95.0	480/0.5	262	147997	153916	165756
120.0	608/0.5	310	191495	199156	214475
150.0	750/0.5	355	237383	246878	265869
185.0	931/0.5	415	291505	303165	326486
240.0	1200/0.5	500	379813	395005	425390
300.0	1500/0.5	550	474160	493126	531059
400.0 *	2013/0.5	590	656952	683230	735786
500.0 *	2562/0.5	660	835188	868596	935410
630.0 *	3416/0.5	725	1110210	1154618	1243435

The item marked * are non stock items refer to marketing dept for delivery schedule MOQ packing etc.

*RR KABEL LSOH – Insulation conforming to HFI TP 70 as per IS 17048

RATNA FLEX SINGLE CORE



Multistrand bright electrolytic annealed bare copper conductor, PVC Insulated Unsheathed Single core round flexible Industrial Power Cables for working voltages upto and including 1100 Volts (HSN CODE : 8544)

Size (Sq.mm)	Configuration	AMPS	Rate Per 100 Mtr
0.5	16/0.2	5	872
0.75	24/0.2	8	1256
1.0	32/0.2	13	1621
1.5	30/0.25	17	2344
2.5	50/0.25	24	3789
4.0	56/0.3	30	5944
6.0	84/0.3	38	8806

RATNA FLEX MULTICORE CABLES



Multistrand bright electrolytic annealed bare copper conductor, PVC Insulated & PVC sheathed multicore round flexible Industrial Cables for working voltages upto and including 1100 Volts, as per IS 694 (HSN CODE : 8544)

Rate per 100 meter											
Size (Sq.mm)	CONFIG.	AMPS	2 CORE	3 CORE	4 CORE	Size (Sq.mm)	CONFIG.	AMPS	2 CORE	3 CORE	4 CORE
0.5	16/0.2	5	2642	3510	4489	25.0	196/0.4	88	89596	127018	169763
0.75	24/0.2	8	3486	4697	6101	35.0	276/0.4	112	-	178223	238444
1.0	32/0.2	13	4243	5747	7464	50.0	396/0.4	146	-	253206	337748
1.5	30/0.25	17	5658	7856	10379	70.0	360/0.5	216	-	363125	481030
2.5	50/0.25	24	9000	12599	16708	95.0	480/0.5	262	-	487536	639265
4.0	56/0.3	30	13888	19574	25764	120.0	608/0.5	310	-	615491	815155
6.0	84/0.3	38	20023	28836	37942	150.0	750/0.5	355	-	781282	1024725
10.0	140/0.3	52	35043	50448	66371	185.0	931/0.5	415	-	960028	1246664
16.0	126/0.4	70	55270	78433	103845	240.0	1200/0.5	500	-	1247692	1686015
						300.0	1500/0.5	550	-	1556354	2105987

CONTROL CABLES



Multistrand bright electrolytic annealed bare copper conductor, PVC Insulated & PVC sheathed multicore round flexible Industrial Control Cables (JZ-500), Voltages Grade 300/500 V. (HSN CODE : 8544)

Rate per 100 meter												
Size (Sq.mm)	CONFIG.	AMPS	5 CORE *	6 CORE *	7 CORE *	8 CORE *	10 CORE *	12 CORE *	14 CORE *	16 CORE *	19 CORE *	24 CORE *
0.5	16/0.2	5	5928	6685	7595	9017	11188	13140	15222	17240	20343	26039
0.75	24/0.2	8	8086	9675	10741	12878	15748	18731	21752	25055	30209	37838
1.0	32/0.2	13	10274	11811	13451	16021	19774	23691	27222	31112	38360	47210
1.5	30/0.25	17	13958	16894	19324	22447	28108	33496	38997	43926	51973	66592
2.5	50/0.25	24	22570	27498	31506	36534	46032	54211	62987	72688	85626	108525
4.0	56/0.3	30	35223	42881	49542	58345	73628	87217	101577	115771	136766	174738
6.0	84/0.3	38	51991	64135	74746	85638	109426	129707	150354	171248	202077	257834
10.0	140/0.3	52	90549	-	-	-	-	-	-	-	-	-
16.0	126/0.4	70	139953	-	-	-	-	-	-	-	-	-

Loading factor for Different Insulation / Sheath * -

FR Insulation	FR Sheath	FR-LSH / HR Insulation	FR-LSH / HR Sheath	LSOH Insulation	LSZH Sheath
5%	5%	10%	10%	35%	25%

The item marked * are non stock items, refer to marketing dept. for delivery schedule, MOQ, packing etc.

SUBMERSIBLE FLAT CABLES

RR Kabel makes 3 Core PVC Insulated and sheathed Industrial Flat cables for Submersible Motor, working voltages upto and including 1100 Volts, as per IS 694



Size (Sq.mm)	Configuration	Rate 100 mtr
1.5	22/0.3	8441
2.5	36/0.3	13284
4.0	56/0.3	19664
6.0	84/0.3	28246
10.0	140/0.3	49183
16.0	126/0.4	77752
25.0	196/0.4	122120

* For XLPE Insulated Submersible Flat Cables (Cu/XLPE/PVC), contact us for pricing and availability. MOQ will be applicable.

ONLY THE BEST SUBMERSIBLE CABLES CAN WITHSTAND THE HARSHTEST CONDITIONS.

- PVC & XLPE Insulation
- Electrolytic Grade Annealed Copper
- Better Conductivity
- CE, REACH & RoHS Compliant



AKALMAND BANO, SAHI CHUNO.

SHIELDED CABLES



Flexible / Stranded Bare Copper Conductor, PVC Insulated, Overall Aluminium Mylar Tape Shielded with ATC Drain Wire and Outer PVC Sheathed Industrial Instrumentation (Shielded) Cables, Voltage Grade 300/500V, as per BS EN 50288-7

SIZE	Size in Sq.mm / Rate Per 100 Meter (in INR)					MOQ (KM)
	0.50	0.75	1.00	1.50	2.50	
2 Core	4641	5631	6494	8308	12217	3
3 Core	5865	7284	8573	11061	16979	3
4 Core	7264	9220	11071	14476	21897	3
5 Core	8349	10829	13025	17450	27195	3
6 Core	9758	12715	15500	20334	-	3
7 Core	10822	14143	17314	23149	35634	3
8 Core	12266	16102	19606	26522	42296	2
9 Core	13561	-	-	-	-	2
10 Core	15040	19808	24402	33475	52456	2
12 Core	17424	23159	28931	39104	62188	2
14 Core	19840	26530	33299	45201	72886	1
16 Core	22501	30524	37632	51242	83189	1
18 Core	24985	33995	42007	57269	93868	1
20 Core	27631	37280	46596	65586	104138	1
22 Core	30424	41149	50993	-	-	1
25 Core	34125	46313	58047	-	-	1
27 Core	36566	49715	61784	-	-	1

Note : Please contact to Technical Cell / HO for Technical Data Sheet.

SHIELDED ARMoured CABLES



Flexible / Stranded Bare Copper Conductor PVC / XLPE Insulated,
 Overall Aluminium Mylar Tape Shielded with ATC Drain Wire, PVC Inner Sheathed, GI Wire / Strip Armour And Outer PVC Sheathed
 Industrial Instrumentation (Shielded Armoured) Cables, Voltage Grade 300/500V, as per BS EN 50288-7.

SIZE	Size in Sq.mm / Rate Per 100 Meter (in INR)					MOQ (KM)
	0.50	0.75	1.00	1.50	2.50	
2 Core	9212	10685	11847	14218	19062	5
3 Core	11094	12893	15021	17311	24691	5
4 Core	12567	15054	17737	20781	31202	3
5 Core	14416	17410	20731	24626	36652	3
6 Core	15938	19537	23529	28962	-	3
7 Core	16870	20960	24707	31628	48334	3
8 Core	19390	23398	27604	35752	54225	3
9 Core	20534	-	-	-	-	3
10 Core	22056	27211	33952	44048	66709	3
12 Core	24936	30876	38370	49791	78327	3
14 Core	27652	34673	44195	57351	87326	3
16 Core	30909	40922	47745	64533	98682	3
18 Core	35523	41904	53374	71683	108744	3
20 Core	38680	46322	58480	81484	119298	2
22 Core	39924	50675	63355	-	-	2
24 Core	-	-	68705	-	-	2
25 Core	43721	55893	70849	-	-	2
27 Core	45946	59019	78621	-	-	2

Note : Please contact to Technical Cell / HO for Technical Data Sheet.

BRAIDED CABLES



Flexible / Stranded Bare Copper Conductor, PVC Insulated, Annealed Tinned Copper Braided with Optimum coverage and Outer PVC sheathed Industrial Braided cables, Voltage Grade 300/500V.

Size in Sq.mm / Rate Per 100 Meter (in INR)						
SIZE	0.25	0.50	0.75	1.00	1.50	2.50
2 Core	6428	7405	7960	9009	11490	16033
3 Core	6917	8025	9889	11164	14568	21254
4 Core	8317	10102	12251	14133	18225	27777
5 Core	10415	11141	14388	16847	22273	33579
6 Core	12270	12424	15519	19112	25010	-
7 Core	12955	13359	18064	21094	27434	42479
8 Core	13881	15067	19466	23575	31690	-
9 Core	-	-	-	-	35455	-
10 Core	16583	19143	24501	29750	39387	-
12 Core	18373	20820	28102	34808	45878	71039
14 Core	-	23849	32070	39513	53226	-
16 Core	-	26848	36156	44476	59929	-
18 Core	25860	29489	40138	49279	66634	-

Size in Sq.mm / Rate Per 100 Meter (in INR)				
SIZE	4.0	6.0	10.0	16.0
2 Core	24279	33457	-	-
3 Core	33329	46360	-	-
4 Core	40392	56911	97363	160565

Note : Minimum Order Quantity (MOQ)

Size - upto 0.25 x 8C - 5 KM, upto 0.25 x 8C to 18C and 0.50 to 1.50 x 7C - 3 KM,
 0.50 x 8C to 4.0 x 4C - 2 KM, 0.50 x 22C to 1.00 x 27C - 2 KM.

PAIR SHIELDED CABLES



Flexible / Stranded Bare Copper Conductor, PVC / XLPE Insulated, Twisted Pairs, Overall Aluminium Mylar Tape Shielded with ATC Drain Wire and Outer PVC Sheathed Industrial Instrumentation (Pair Shielded) Cables, Voltage Grade 300/500V, as per BS EN 50288-7.

Size in Sq.mm / Rate Per 100 Meter (in INR)							
Number of Pair	0.50	0.75	MOQ (KM)	1.00	1.50	2.50	MOQ (KM)
1	5671	7016	10	8442	9819	14129	5
2	9204	11294	5	14000	17727	26315	3
3	11910	15037	3	18958	24532	37074	3
4	13854	19153	3	24338	31808	48432	3
5	16884	23576	3	30171	38548	59046	3
6	19704	27692	3	35583	45678	70194	2
8	25294	34935	3	45127	59840	92409	2
10	30835	42842	3	55546	73953	114559	2
12	36345	50717	3	65932	88018	136661	2
14	-	-	-	-	100964	-	1
16	47655	66953	2	87353	117087	182371	1
20	58624	82687	2	108142	145313	226752	1
24	69546	98372	2	128867	173459	271069	1

Flexible / Stranded Bare Copper Conductor, PVC / XLPE Insulated, Twisted Pairs, Individual pair and Overall Aluminium Mylar Tape Shielded with ATC Drain Wire and Outer PVC Sheathed Industrial Instrumentation (Pair Shielded) Cables as per BS EN 50288-7.

Size in Sq.mm / Rate Per 100 Meter (in INR)							
Number of Pair	0.50	0.75	MOQ (KM)	1.00	1.50	2.50	MOQ (KM)
2	11942	13903	5	17030	20708	29539	2
3	15215	18926	5	23463	28940	41854	2
4	19428	23706	3	28777	37673	54784	2
5	23852	29312	3	35745	45726	66856	1
6	28065	34611	2	42307	54282	79559	1
8	36458	45159	2	55384	71344	104934	1
10	44803	55675	1	68411	88342	130244	1
12	53131	66159	1	81423	102325	155505	1
16	70145	85295	1	105210	136288	201734	1
20	86835	105760	1	130617	169440	251122	1
24	103508	126226	1	156008	202577	300495	1
25	-	-	-	162359	-	-	1

Note: The MOQ is given above, please send your requisition to Technical Cell / HO for Technical Data Sheet before finalizing the orders.

PAIR SHIELDED ARMOURED CABLES



Flexible / Stranded Bare Copper Conductor, PVC / XLPE Insulated, Twisted Pairs, Overall Aluminium Mylar Tape Shielded with ATC Drain Wire, PVC Inner Sheathed, GI Wire/Strip Armour and Outer PVC Sheathed Industrial Instrumentation (Overall Pair Shielded Armoured) Cables, Voltage Grade 300/500V, as per BS EN 50288-7.

Size in Sq.mm / Rate Per 100 Meter (in INR)							
Number of Pair	0.50	0.75	MOQ (KM)	1.00	1.50	2.50	MOQ (KM)
1	9212	10685	10	11846	14219	19062	5
2	14006	16821	5	19128	23807	32921	3
3	16428	19733	3	23611	30156	44980	3
4	19864	24216	3	29272	39679	54029	3
5	22711	28880	3	35228	45144	66513	3
6	25869	33216	3	42559	52687	78098	2
8	33821	40677	3	50494	67740	101005	2
10	37028	48858	3	61015	82434	123700	2
12	42853	56941	3	71405	96734	146214	2
14	-	-	-	-	110413	-	1
16	54601	73353	2	92628	126465	192422	1
20	65875	89142	2	113081	155606	237140	1
24	77001	104785	2	133354	183750	281630	1

Flexible / Stranded Bare Copper Conductor, PVC / XLPE Insulated, Twisted Pairs, Individual Pair and Overall Aluminium Mylar Tape Shielded with ATC Drain Wire, PVC Inner Sheathed, GI Wire / Strip Armour and Outer PVC Sheathed Industrial Instrumentation (Individual Pair and Overall Shielded Armoured) Cables, Voltage Grade 300/500V, as per BS EN 50288-7.

Size in Sq.mm / Rate Per 100 Meter (in INR)							
Number of Pair	0.50	0.75	MOQ (KM)	1.00	1.50	2.50	MOQ (KM)
2	16495	19282	5	22150	26071	34740	2
3	20222	23382	5	27222	34141	44236	2
4	24208	29118	3	34692	43020	56680	2
5	30495	36733	3	41838	49469	69886	1
6	35081	39682	2	47087	57960	82249	1
8	41060	50571	2	60326	74747	106765	1
10	49550	61314	1	73402	91372	131087	1
12	57960	71976	1	86381	107883	155278	1
16	74941	93624	1	112809	141635	204878	1
20	91534	114721	1	138573	174496	253132	1
24	108029	135737	1	164223	207243	301240	1
25	-	-	-	170623	-	-	1

Note: The MOQ is given above, please send your requisition to Technical Cell / HO for Technical Data Sheet before finalizing the orders.

TERMS & CONDITIONS:

GST : The above prices are exclusive of GST.

Packing : Order should be in Standard packing.

Freight : Value upto Rs. 2,00,000/- on 'TO-PAY' basis & above on 'PAID' basis

Note: This is Revised Price List, hence all previous Price List & Discount will not be considered.

**As per the international practice which is also adopted by BIS, for all cables with ISI mark the size of the conductor is decided by its resistance only. The construction of the conductor mentioned in the price-list are only for guidelines and are as per market convention, it may vary within the prescribed limit of IS 8130, with related classes and tables

THE PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.



WORLD OF EXCELLENCE



As a USD 850 + million conglomerate, we are one of the largest, diversified & most prominent brands in the Indian electrical industry, with a noteworthy presence in over 85+ countries across the world. We offer a multi faceted range of quality products through our 10 successfully operating companies, 42 marketing offices and 12 manufacturing facilities.

At RR Global, we continue to innovate to ensure only the finest products reach our customers.



Ram Ratna House, Oasis Complex, P. B. Marg, Worli, Mumbai - 400 013.

T: +91 - 22 - 2494 9009 / 2492 4144 • **F:** +91 - 22 - 2491 2586 • **E:** mumbai.rrkabel@rrglobal.com

305/A, Windsor Plaza, R. C. Dutt Road, Alkapuri, Vadodara - 390 007.

T: +91 - 265 - 2321 891 / 2 / 3 • **F:** +91 - 265 - 2321 894 • **E:** vadodara.rrkabel@rrglobal.com

R R KABEL LIMITED

Regd. Office : Ram Ratna House, Oasis Complex, P. B. Marg, Worli, Mumbai - 400 013.

Ahmedabad: 079 - 4900 0100, **Bengaluru:** 080 - 4125 0079 / 4090 2221, **Bhubaneswar:** 0674 - 2971 231,
Chennai: 044 - 2829 2329 / 2429, **Coimbatore:** 0422 - 2910 560, **Guwahati:** 0361 - 2730772,
Haryana: 0130 - 2986 986, **Indore:** 0731 - 4009 863, **Jaipur:** 0141 - 2741417, **Jalandhar:** 0181 - 500 3394,
Ernakulam: 0484 - 2378 782, **Kolkata:** 033 - 6607 1233 / 2262 8660, **Lucknow:** 0522 - 4113 745 / 46,
Madurai: 0452 - 4370 340, **New Delhi:** 011 - 4303 8395 / 2735 5477 / 78, **Pune:** 8956 811 100,
Raipur: 0771 - 2971 518, **Rajkot:** 0932 7722 501, **Secunderabad:** 040 - 2780 4098,
Silvassa: 0260 - 2641 333, **Surat:** 9376 507 543, **Trichy:** 8939 830 338.

www.rrkabel.com • www.rrglobal.com

The technical data mentioned in the book has been derived to have the best production place. Having known that innovation has always been the base for R R Kabel products, the technical data would vary from time to time. Hence, current details should always be checked with R R Kabel for accuracy.

REACH = Registration, Evaluation, Authorisation and Restriction of Chemicals
RoHS = Restriction of Hazardous Substances | **CE** = Conformance Européenne
ISI = Indian Standard Institution